

G PLASERSYSTEMS custom industrial solutions part of HID

READY

Infrared Laser Series

SIRIO

Pulsed Fiber Laser for Industrial Application

Features

- High contrast marking in extended frequency range
- From 20W to 50W
- Excellent beam quality
- Profibus and embedded PC as option
- Air cooled
- Easy of integration (19 inches rack)

Applications

- Marking and deep engraving
- High contrast on laser annealing
- Safety ID marking for high speed productivity on Policarbonate and PVC



GAPLASERSYSTEMS


Infrared Laser Series

SIRIO

		SIRIO 20	SIRIO 30	SIRIO 60
Operational mode			Pulsed Fiber Laser	
Wavelength	[nm]		1060 ~ 1085	1064
Nominal Power	[\/\]	20	30	60
Beam quality (nominal)	[M2]	<1.8	<1.8	<1.5
Polarization			Random	
Pulse repetition rate	[KHz]	20-80	30 - 80	1-4000
Pulse energy	[mJ]	1@20 KHz	1@30 KHz	2
Pulse width (@30KHz)	[ns]	80-140	80-140	2-500
Peek power (nominal)	[KW]	<120@20KHz	<130@30KHz	-
Power Supply	[Vac; Hz]		90-240 ; 50/60	
Power consumption	[\/\]	<800	<1000	<1500
Cooling system	Air			
Communication	RS232 (Ethernet avaible upon request)			
Compliance	2004/108/CE; 2006/95/CE; EN60950-1; EN 608225-1; EN 12626			

- Integrated embedded PC as option

- 3D System available upon request

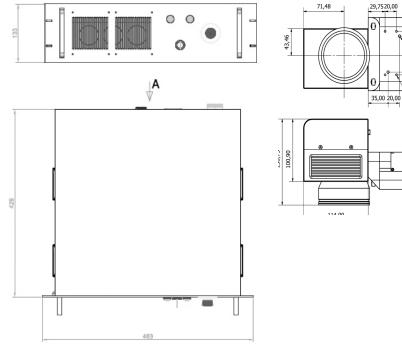




Specifications are subject to variations and updates without notice. Class 4 laser source. This OEM laser component is for sale solely to qualified manufacturers, who shall provide interlocks, indicators and other appropriate safety features, in full compliance with 21 CFR 1040 and/or other applicable national and local regulations.



GAP Laser Systems s.r.l. A Certified and ISO 9001:2008 Company



M4x0.7 - 6H Ø4,00 -6,00 PROFONDITÀ

26,54

30,87 70,00



Via IV Novembre 116 - 21058 Solbiate Olona (VA) - Italy Tel: +39 0331 072637 - Fax: +39 0331 072695 www.gaplaser.com - info@gaplaser.com

SIRIO Layout