

aq^s GAP NET tyl crystal diode libra UV sirio
 femto custom industrial 3D
 orion fiber laser head mirror venus Halin lens light dpss solutions

GAP LASER SYSTEMS

custom industrial solutions
 part of **HID**

Infrared Laser Series

SIRIO

Pulsed Fiber Laser
 for Industrial Application




Features

- High contrast marking in extended frequency range
- From 20W to 50W
- Excellent beam quality
- Profibus and embedded PC as option
- Air cooled
- Easy of integration (19 inches rack)

Applications

- Marking and deep engraving
- High contrast on laser annealing
- Safety ID marking for high speed productivity on Polycarbonate and PVC

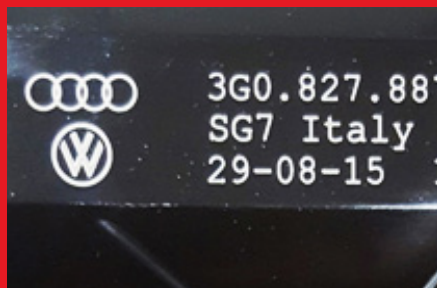


Infrared Laser Series

SIRIO

	SIRIO 20	SIRIO 30	SIRIO 60
Operational mode	Pulsed Fiber Laser		
Wavelength [nm]		1060 ~ 1085	1064
Nominal Power [W]	20	30	60
Beam quality (nominal) [M2]	<1.8	<1.8	<1.5
Polarization	Random		
Pulse repetition rate [kHz]	20-80	30 - 80	1-4000
Pulse energy [mJ]	1@20 KHz	1@30 KHz	2
Pulse width (@30kHz) [ns]	80-140	80-140	2-500
Peek power (nominal) [kW]	<120@20KHz	<130@30KHz	-
Power Supply [Vac; Hz]	90-240 ; 50/60		
Power consumption [W]	<800	<1000	<1500
Cooling system	Air		
Communication	RS232 (Ethernet available upon request)		
Compliance	2004/108/CE; 2006/95/CE; EN60950-1; EN 608225-1; EN 12626		

- Integrated embedded PC as option
- 3D System available upon request

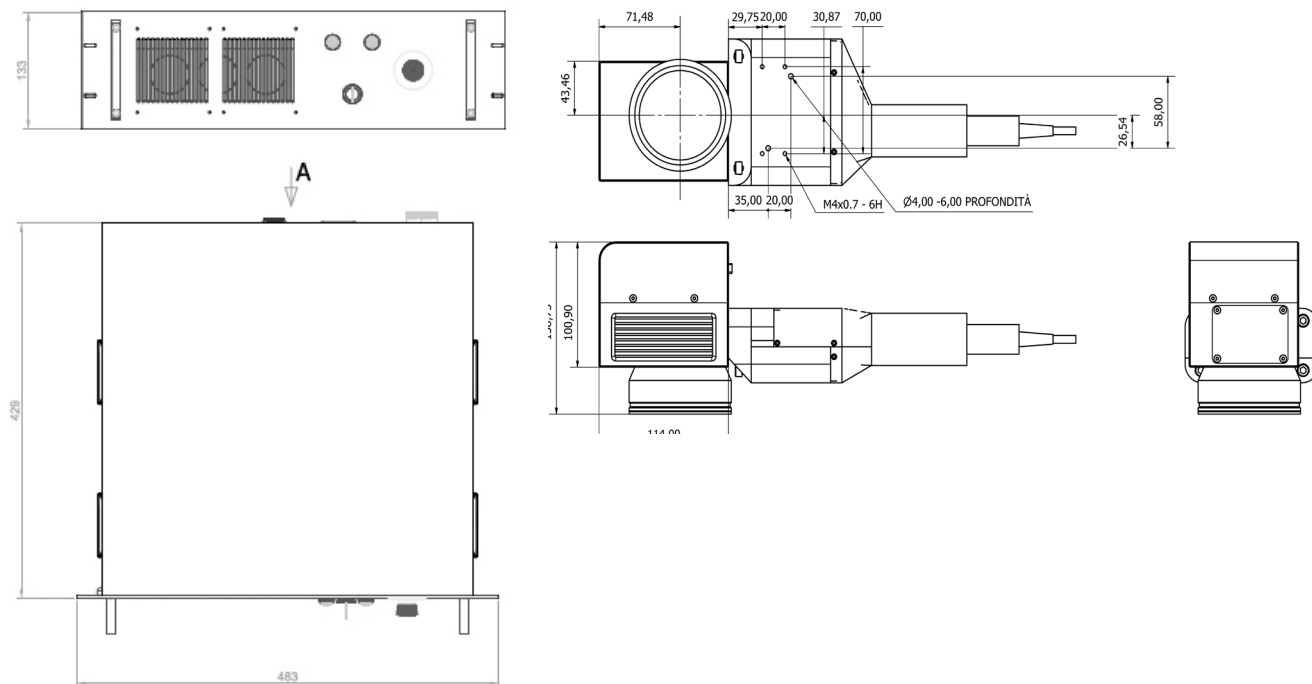

Specifications are subject to variations and updates without notice. Class 4 laser source. This OEM laser component is for sale solely to qualified manufacturers, who shall provide interlocks, indicators and other appropriate safety features, in full compliance with 21 CFR 1040 and/or other applicable national and local regulations.



GAP Laser Systems s.r.l.
A Certified and
ISO 9001:2008 Company



Via IV Novembre 116 - 21058 Solbiate Olona (VA) - Italy
Tel: +39 0331 072637 - Fax: +39 0331 072695
www.gaplaser.com - info@gaplaser.com

SIRIO Layout