

aqsGAPNET tyI crystal diode libra sirio
femto custom head mirror venus Halin lens
orion fiber laser head mirror venus Halin lens
3D dpss solutions



355nm Laser - DPSS Lasers

VENUS UV


Laser Solutions for Fine Machining Application

Features

- High peak power and short pulses for reduced thermal damage
- Compact modular design
- Very High Resolution
- $M2<1.2$ TEM 00

Applications

- Fine material processing
- Kapton cutting
- Solar cell scribing
- Wafer dicing
- Wire stripping
- LED scribing
- Glass and plastic marking

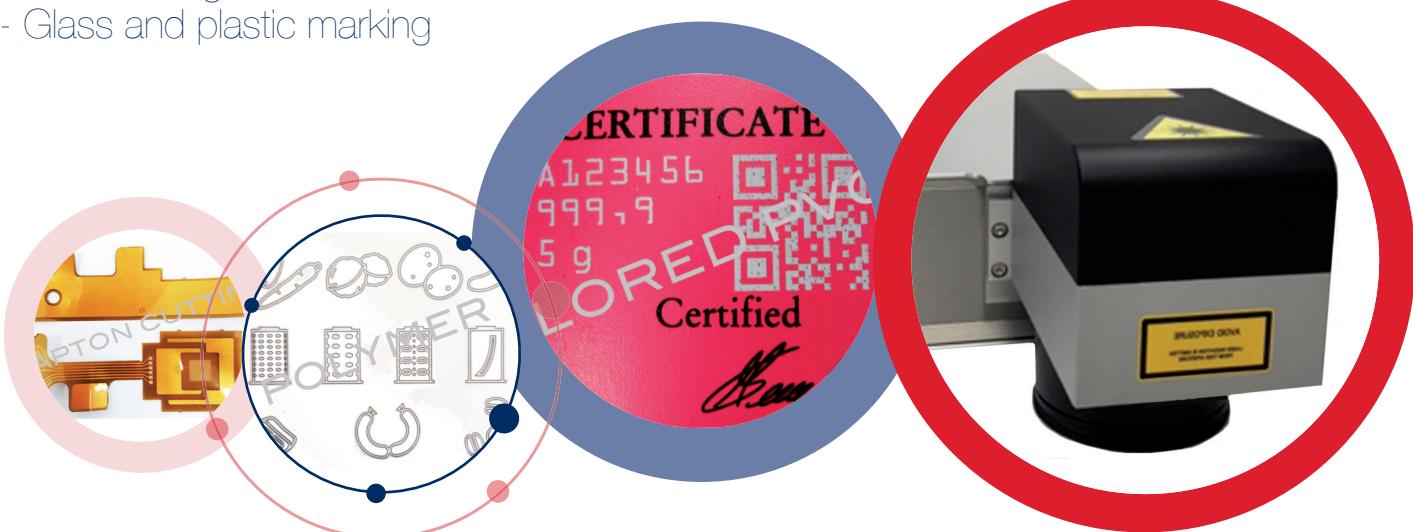

355nm Laser - DPSS Lasers

VENUS UV

VENUS UV




Operational mode

Q-switched DPSSL


Wavelength	[nm]	355
Output Nominal Power	[W]	3W@40KHz @ beam expander output
Beam quality	[M2]	<1.2 TEM 00
Frequency range	[kHz]	20 - 200 in Q-Switch
Pulse width	[ns]	<10nsec. @ 40KHz
Power Supply	[Vac; Hz]	90-240 ; 50/60
Power consumption	[W]	<700W
Cooling system		Air
Communication (**)		RS232
Focal lens		160mm. (110x110mm.) or 254mm. (170x170mm.)

*Different Beam Diameter available upon request **Ethernet available upon request

RACK

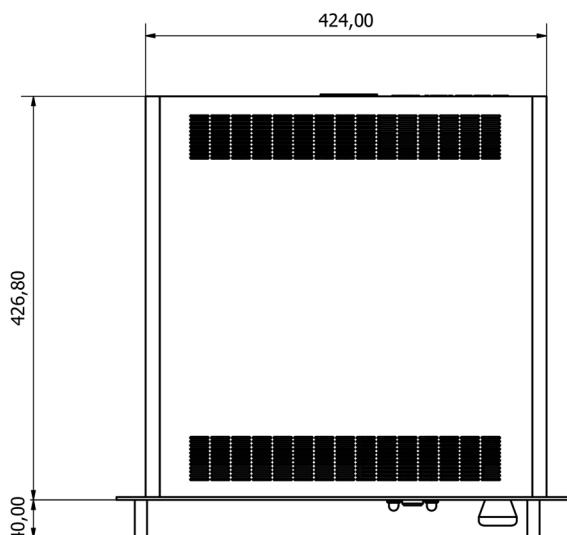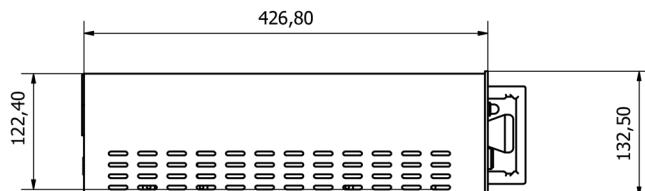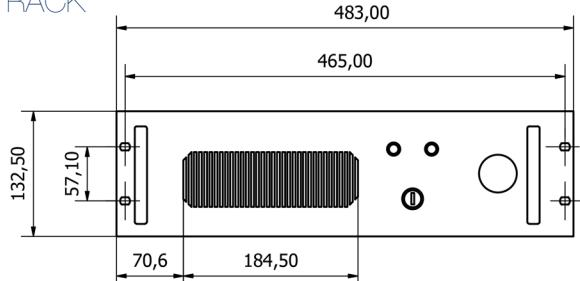

RESONATOR

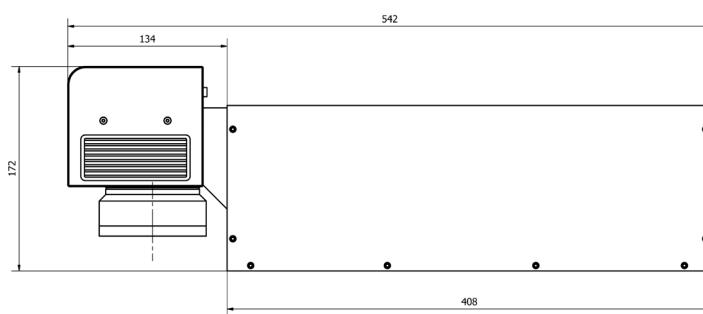

GAP Laser Systems s.r.l.
A Certified and
ISO 9001:2008 Company



Specifications are subject to variations and updates without notice. Class 4 laser source. This OEM laser component is for sale solely to qualified manufacturers, who shall provide interlocks, indicators and other appropriate safety features, in full compliance with 21 CFR 1040 and/or other applicable national and local regulations.



Legal and operational headquarter:

IXLA srl: Via Ponte Chiusella, 28
10090 Romano Canavese (TO)
Tel. +39 0125.719.286
www.ixa.it - info@ixa.it - gaplaser@pec.it SDI: SUBM70N
C.F. e P.IVA it 02075540035 REA TO 1141740

Laser operational and administrative headquarter:

Via IV Novembre, 116
21058 Solbiate Olona (VA)
Tel. +39 0331.072.637
www.gaplaser.com - info@gaplaser.com

VENUS UV Layout